





### General characteristics

Power supply		
Direct current voltage supply		✓
Nominal voltage range	Vdc	9 -> 75
Max. current	A	75

Motor characteristics (1)		24 Vdc	32 Vdc	48 Vdc	
<b>At no load</b>					
Max. output speed	rpm	2 601	3 270	5 000	
Current at the max output speed	A	1	1	0,9	
Standby current	mA	50	50	50	+/-10%
<b>At nominal</b>					
Speed	rpm	2 230	2 960	4 540	+/-10%
Torque (2)	N.m	1,3	1,3	1,3	
Output power	W	304	403	618	+/-10%
Current	A	14,4	14,4	14,4	
Efficiency	%	85	87	87	
<b>At max. output power</b>					
Speed	rpm	1 650	2 160	3 540	
Torque	N.m	4	4	4	
Output power	W	691	905	1 483	
Current	A	42	42	42	
Efficiency	%	67	69	71	
<b>At peak torque</b>					
Speed	rpm	1 650	2 160	3 540	
Torque	N.m	4	4	4	
Output power	W	691	905	1 483	
Current	A	42	42	42	

Others		
Life	h	20 000
Rotor inertia	gcm <sup>2</sup>	536
Rotor poles		8
Cogging torque	mNm	50
Weight	kg	2,7
Noise level	dBA	55

Connecting		
<b>I/O M16 connector 18 pins</b>		
Optional logic supply	Pin N°	1
0 Volt		2
Input 6 (analogic 1)		3
Input 5 (analogic 2)		4
Input 1 (digital)		5
Input 2 (digital)		6
Input 3 (digital)		7
Input 4 (digital)		8
0 Volt		9
Output 1 (digital - PWM)		10
Output 2 (digital - PWM)		11
Output 3 (digital)		12
Output 4 (digital)		13
0 Volt		14
STO 2 -		15
STO 2 +		16
STO 1 -		17
STO 1 +		18
<b>Power supply M16 connector 3 pins</b>		
Output ballast	Pin N°	1
+VDC		2
0 Volt		3
<b>CAN M12 Connector - 5 pins</b>		
Not connected	Pin N°	1 / 2
CAN_GND		3
CAN_H		4
CAN_L		5

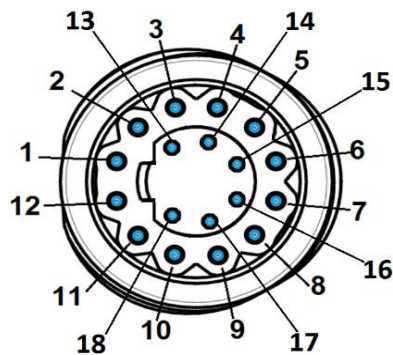

Drive		
<b>Type</b>	<b>SMI22 CAN</b>	
Built-in drive	✓	
Internal magnetic encoder	4096 pulses/rev	
Setting software on PC	DCmind soft+CANopen	
<b>Control</b>		
Position - speed - torque	✓	
4 quadrants	✓	
With regenerative energy absorber (3)	✓	
Type" Field Oriented Control"	✓	
<b>Security</b>		
Wrong polarity from power supply	✓	
Output shortcut	✓	
Input inverted	✓	
Low voltage	Vdc	< 9
Overvoltage (4)	Vdc	> 75
Internal drive temperature protection	°C	110
Temperature drive allowing to restart	°C	90

Generic parameters			
Output shaft with ball bearings	✓		
2 Safe Torque Off inputs	IEC61800-5-2/62061, ISO13849	✓	
Max. radial force (16mm from front face)	N	140	
Max. axial force	N	47	
Temperature range	IEC60068-2-1/2	°C	-30 -> +70
Storage temperature		°C	-40 -> +80
Dielectric (1s/2mA)	UL1004-1	Vdc	1 955
Motor insulation	IEC60085	class	E
Salt spray	ISO9227	severity	48h
Degree of protection (output shaft not included)	IEC60529	IP67 + IP69	
<b>EMC</b>			
Electrostatic discharge	IEC61000-4-2	level	3
Radiated field	IEC61000-4-3	level	3
Electrical fast transient/burst test	IEC61000-4-4	level	3
Surge test	IEC61000-4-5	level	1
Conducted disturbances	IEC61000-4-6	level	3
Radiated emission	EN55022	class	B
<b>Approvals</b>			
ROHS	2011/65/CE	✓	
EC		✓	
UL		Pending	
CAN Open	CIA 301 - DSP 402	✓	
<b>Communication</b>			
USB (Setting, monitoring)	Micro-USB B		
CAN open: address - node ID (factory settings)	0x20		
CAN open: baud rate (factory settings)	kbaud	1000	

Notes	
Values without tolerances are average production values.	
(1) Cold motor, 20°C ambient temp., full speed, sinusoidal commutation	
(2) Nominal torque for continuous operation at 20 °C, decrease this value for higher ambient temperature	
(3) Ballast resistor to be added	
(4) Can be configured via DCmind soft+CANopen	
* V1: see label on product	

Additional information is available in the SQ75 product user manual and in the starter kit manual, available in [www.crouzet.com](http://www.crouzet.com)

## Drive electrical data

Running data				
Parameters		Min.	Typical	Max.
Voltage power supply "Vdc"	Vdc	9	24	75
Current "Idc"	A	-	15	60
Standby power "Wo"	W	-	2	-
Voltage optional logic supply (see wiring diagram)	Vdc	9	-	75*



\* UL: maximum voltage supply: 36 Vdc

CAN Bus characteristics				
Parameters		Min.	Typical	Max.
CAN_L insulated	Vdc	0,5	1,5	2,25
CAN_H insulated	Vdc	2,75	3,5	4,5


## Accessories

Starter kit		
Part number	<b>79 513 105</b>	
Power/logic/CAN 3 m cables - Software - USB to Can Open adapter - CAN terminal resistor - CAN double connector		
Power supply cable	79 298 664	3m length AWG18
Input-Output cable	79 513 106	3m length AWG24
CAN cable M12	27 358 015	1m length AWG26


## Speed-torque and current-torque curves

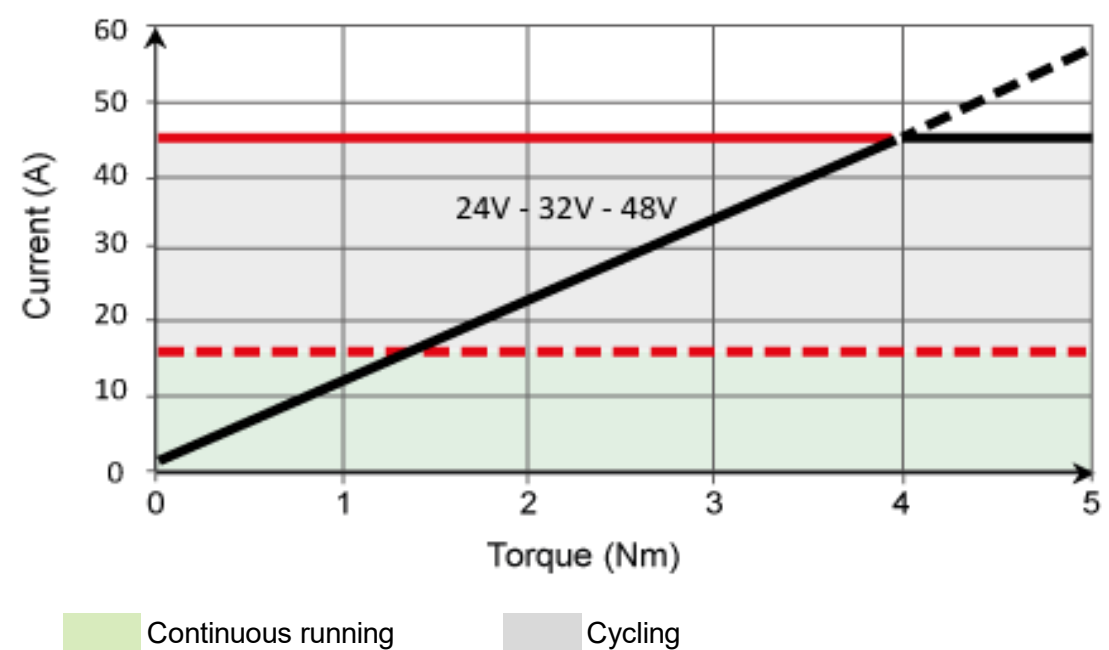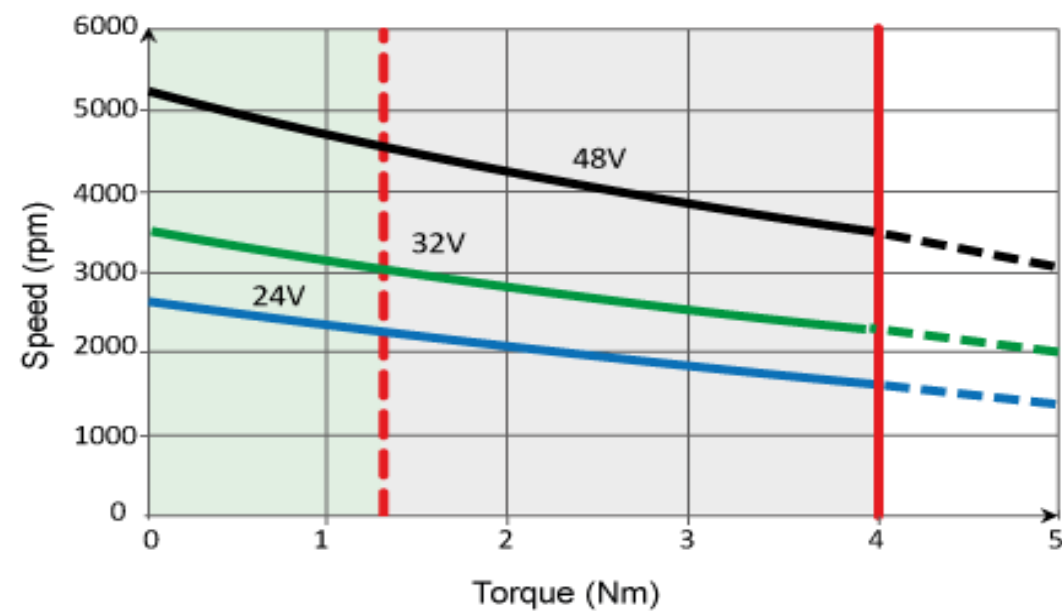


## Wiring

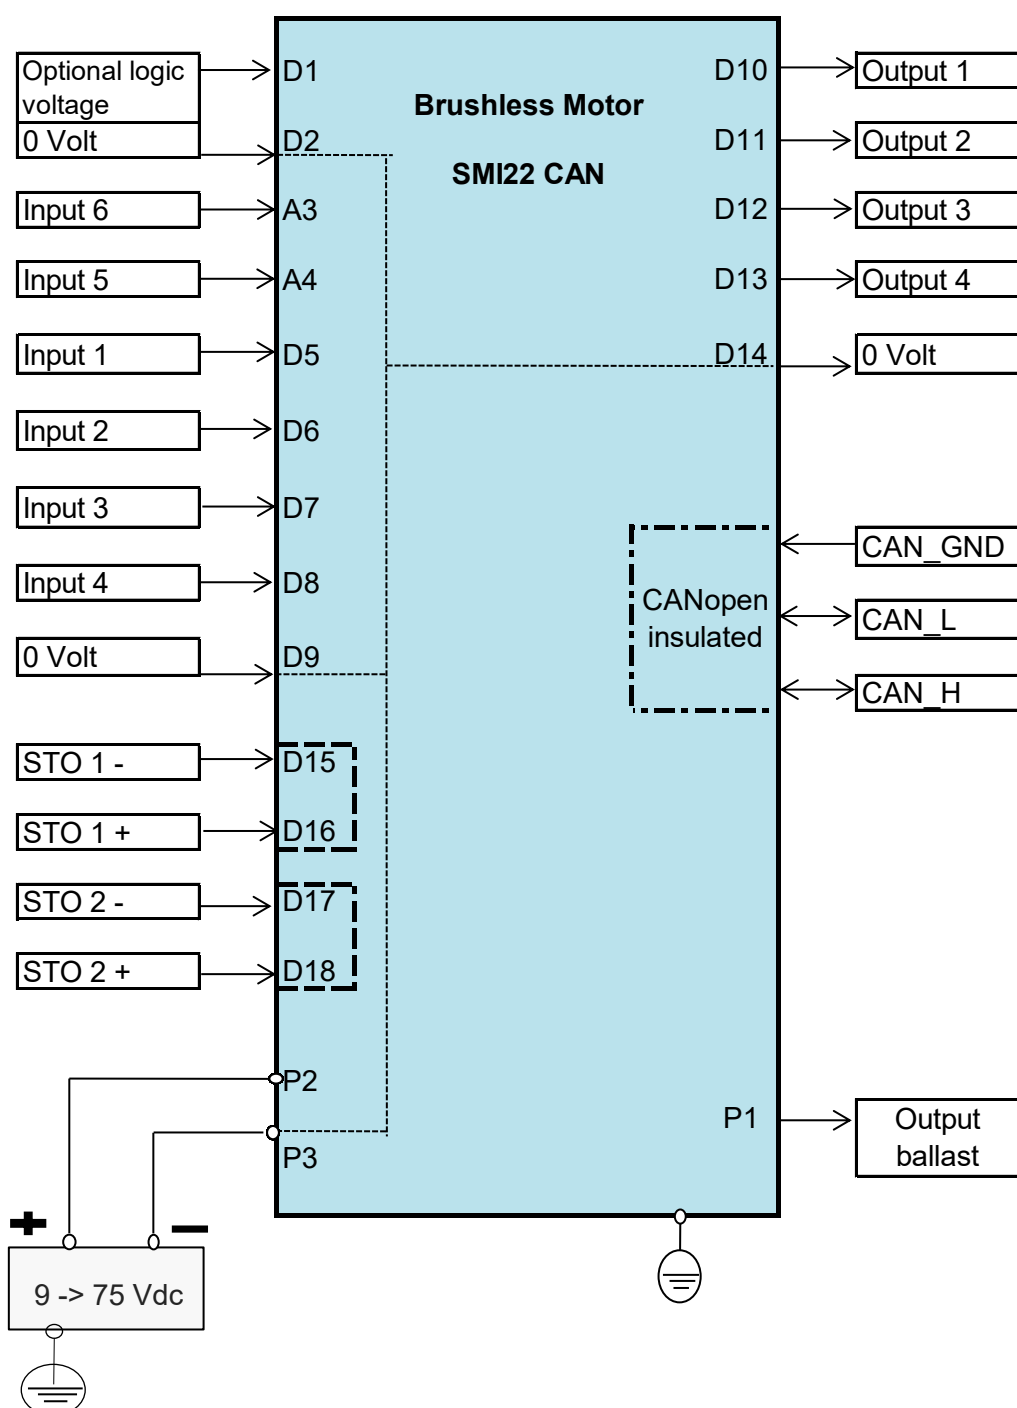

## Input equivalent circuit

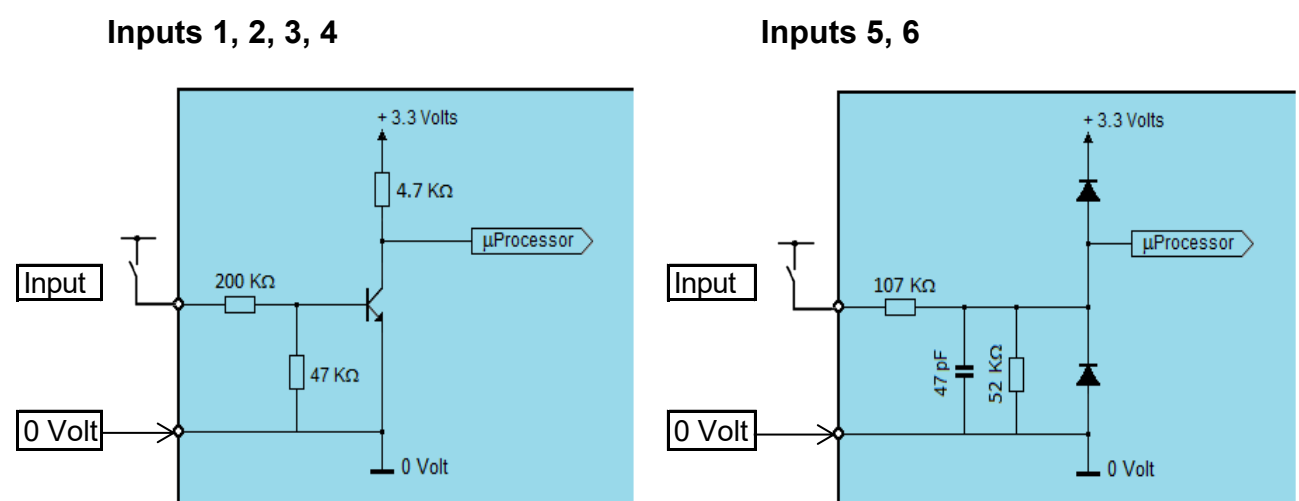

## Output equivalent circuit

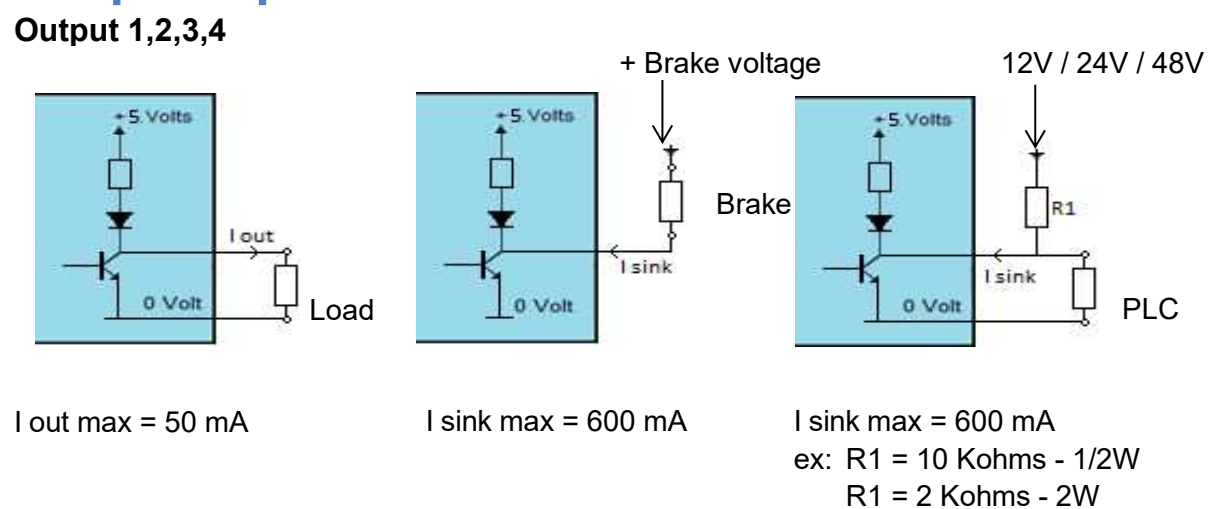




I out max = 50 mA

I sink max = 600 mA

I sink max = 600 mA  
ex: R1 = 10 Kohms - 1/2W  
R1 = 2 Kohms - 2W

Output ballast

Regenerative energy created per inertia load creates over-voltage. In case of too high value, connect R2 resistor through ballast output and ground to absorb this energy. Typical R2 value is 2.2 Ω. Power value depends from machine inertia. Max. voltage can be set.

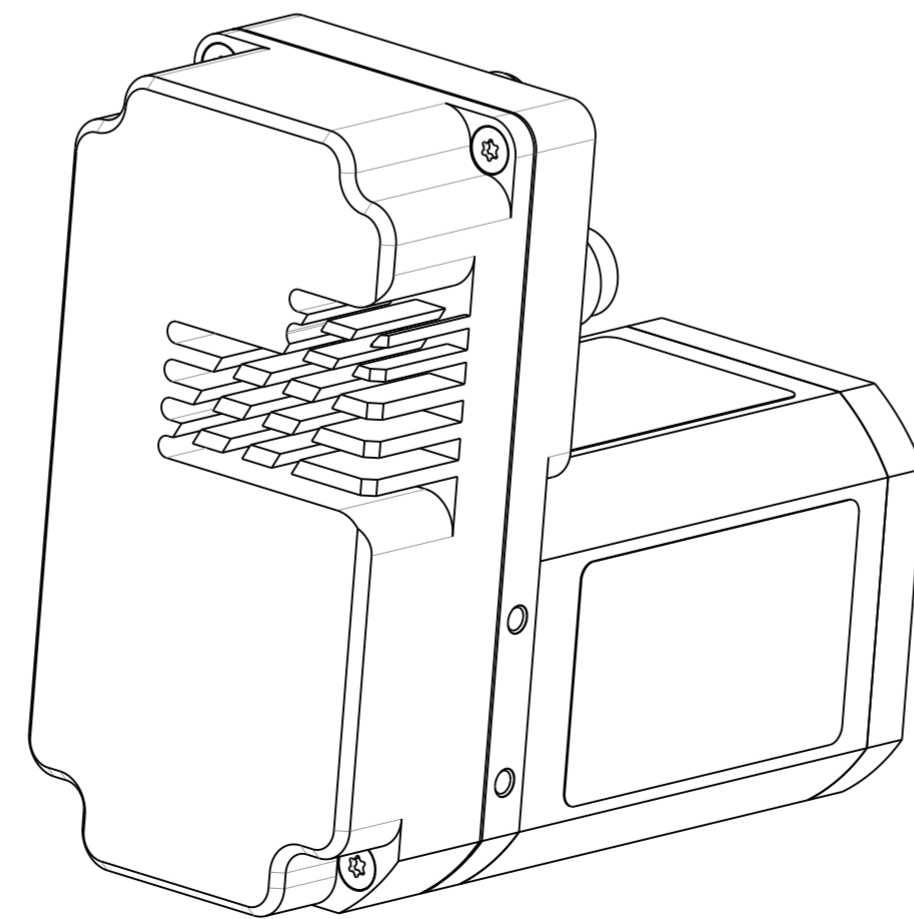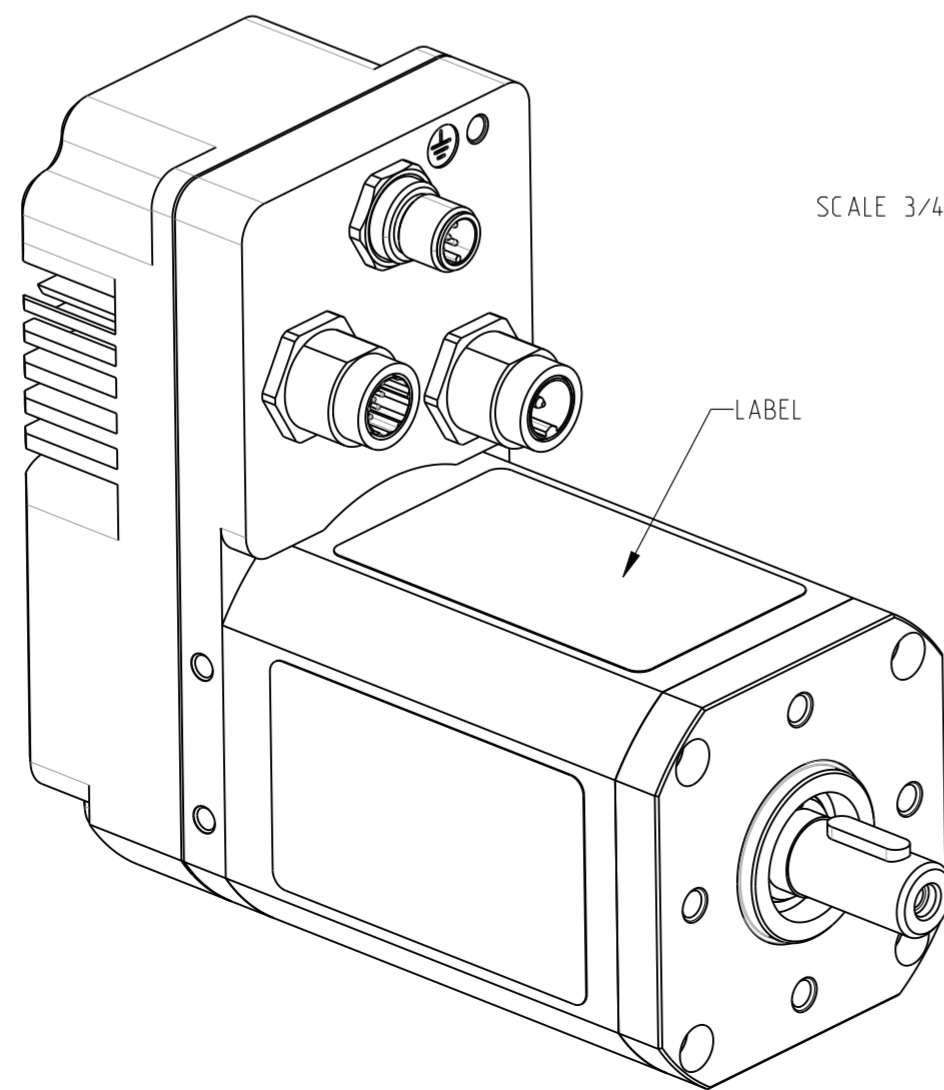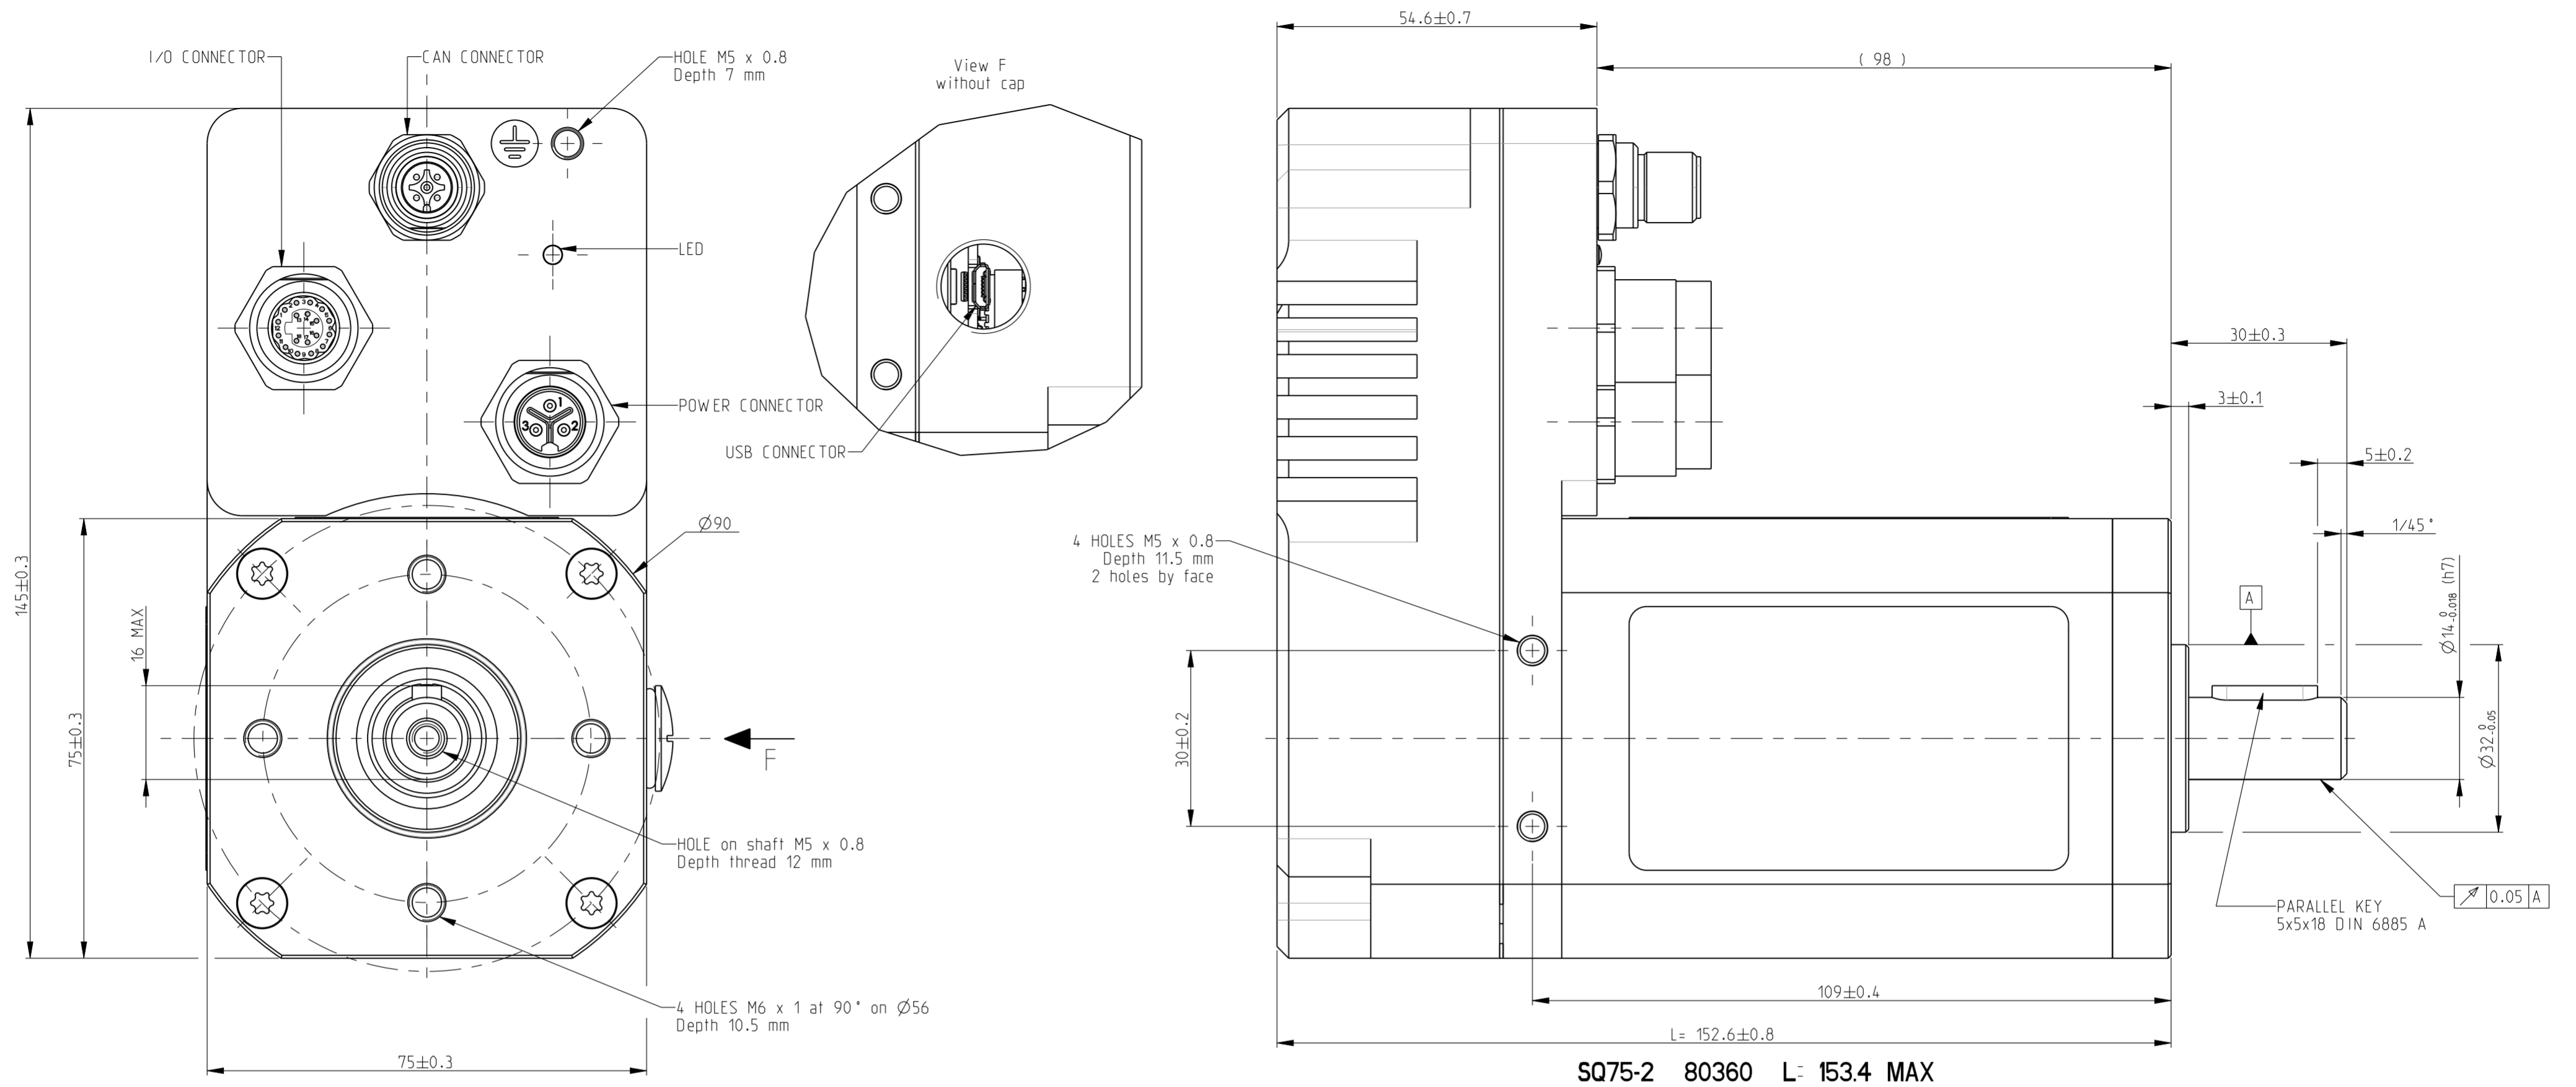

**80360001 - V1**

**CROUZET**